



EXHIBIT A





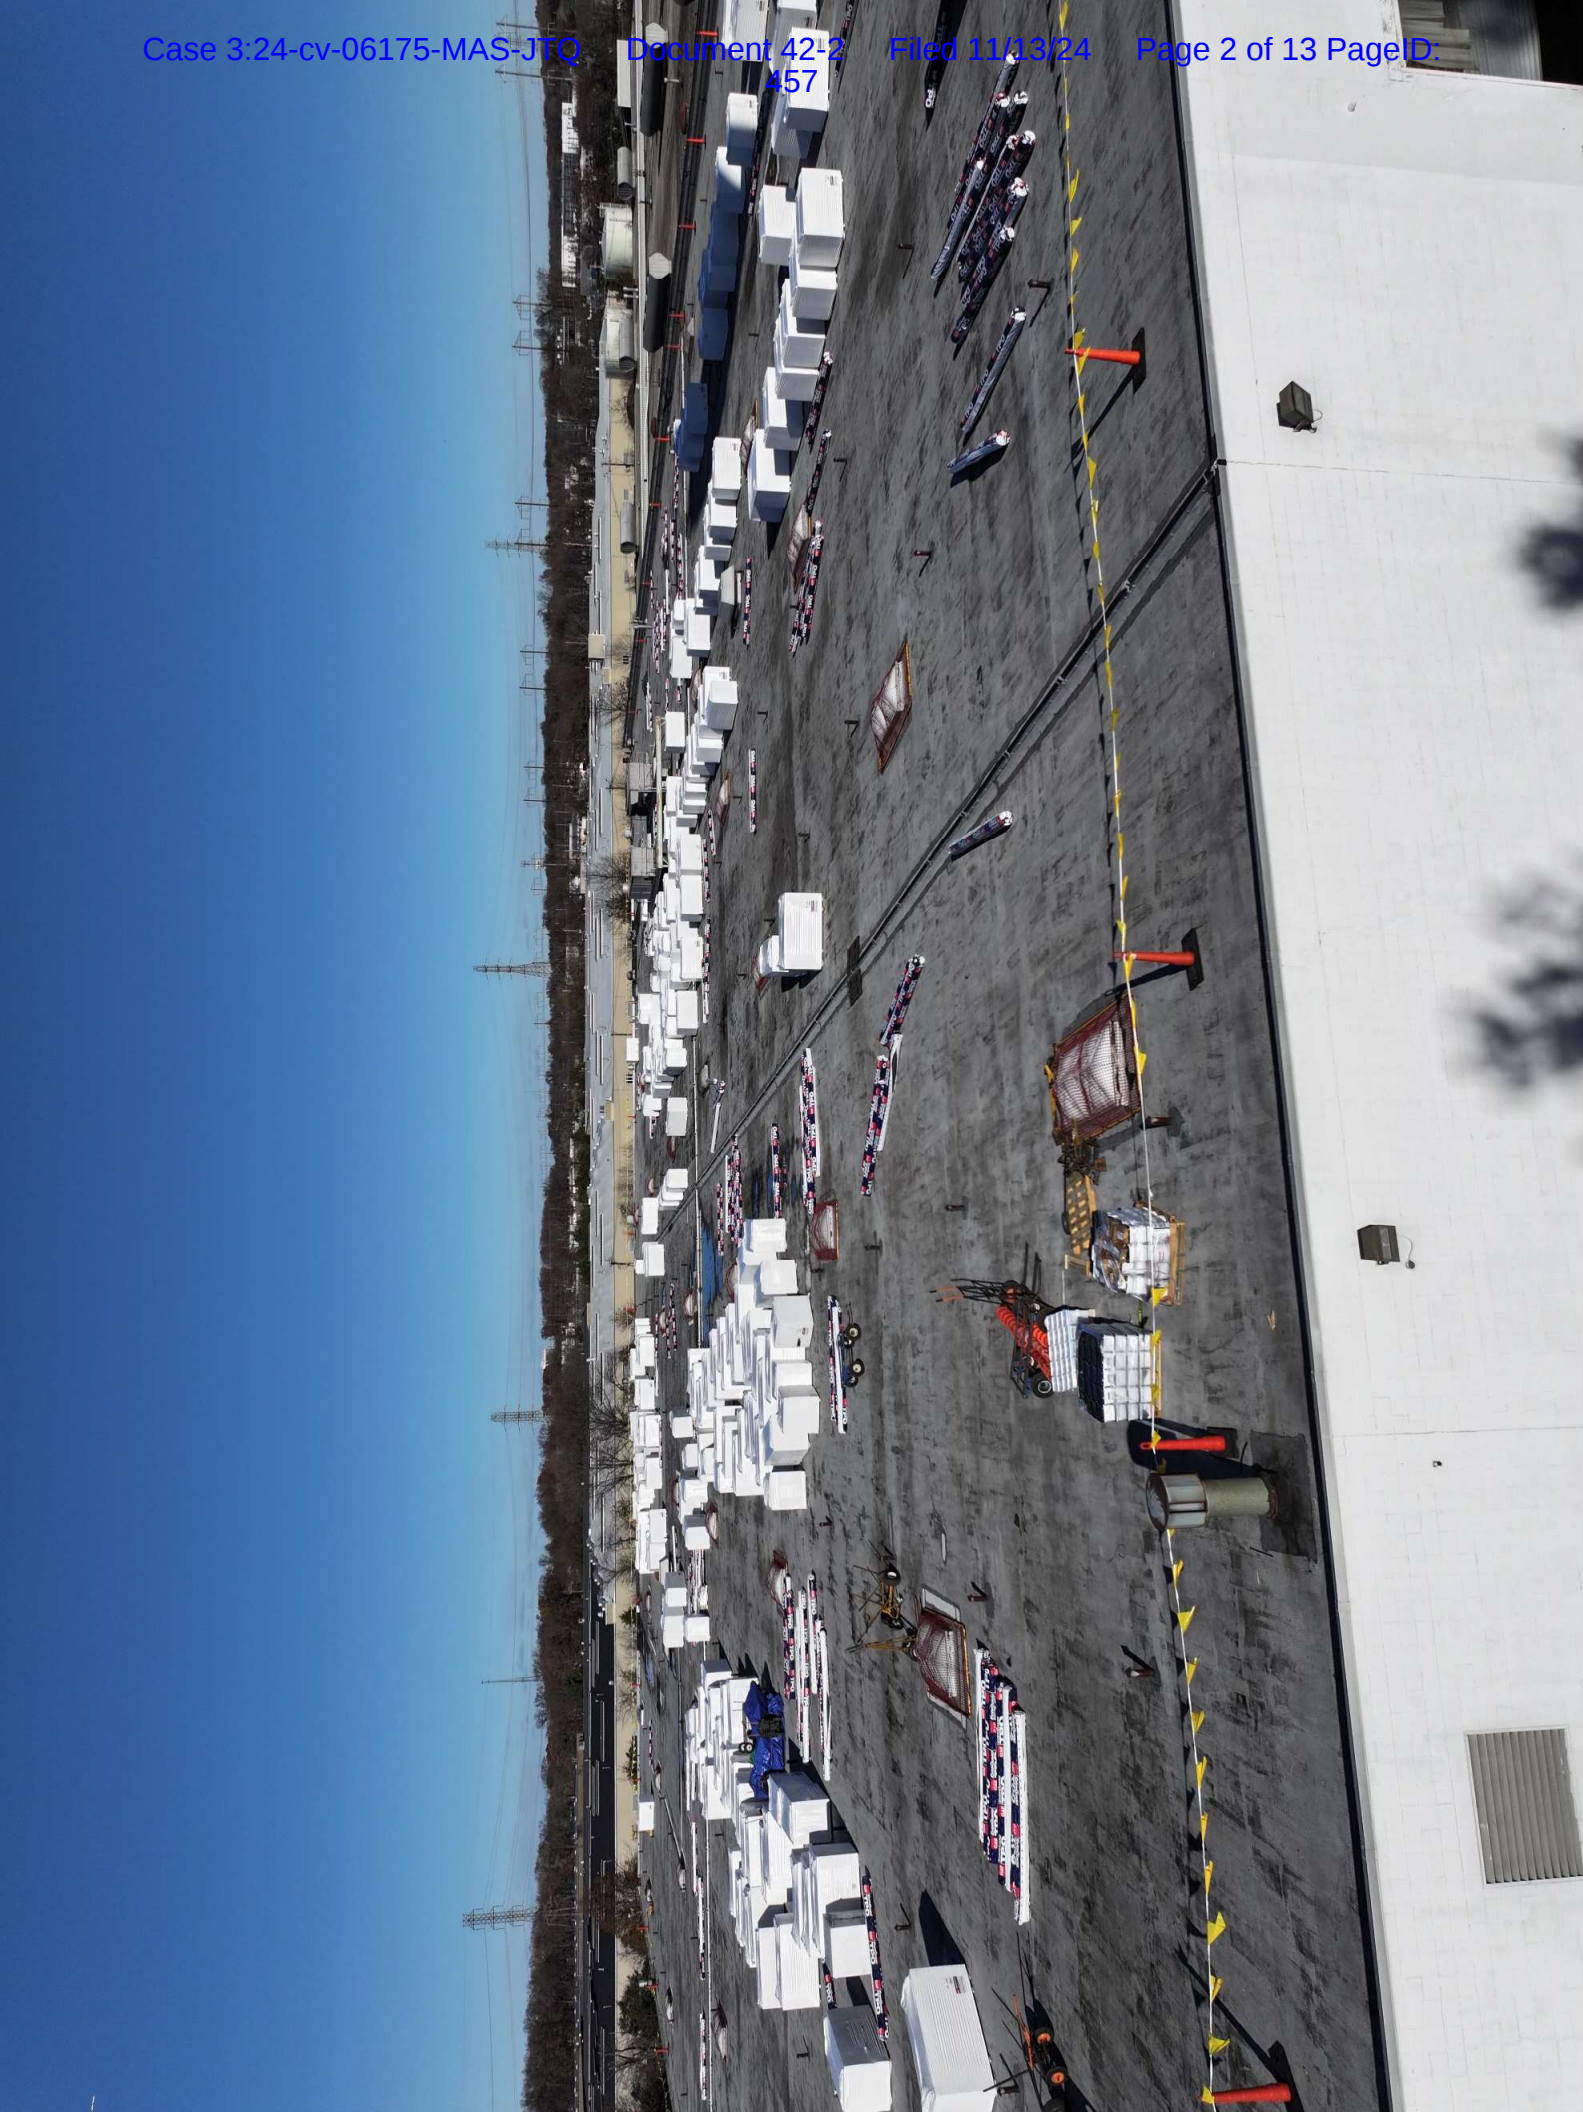

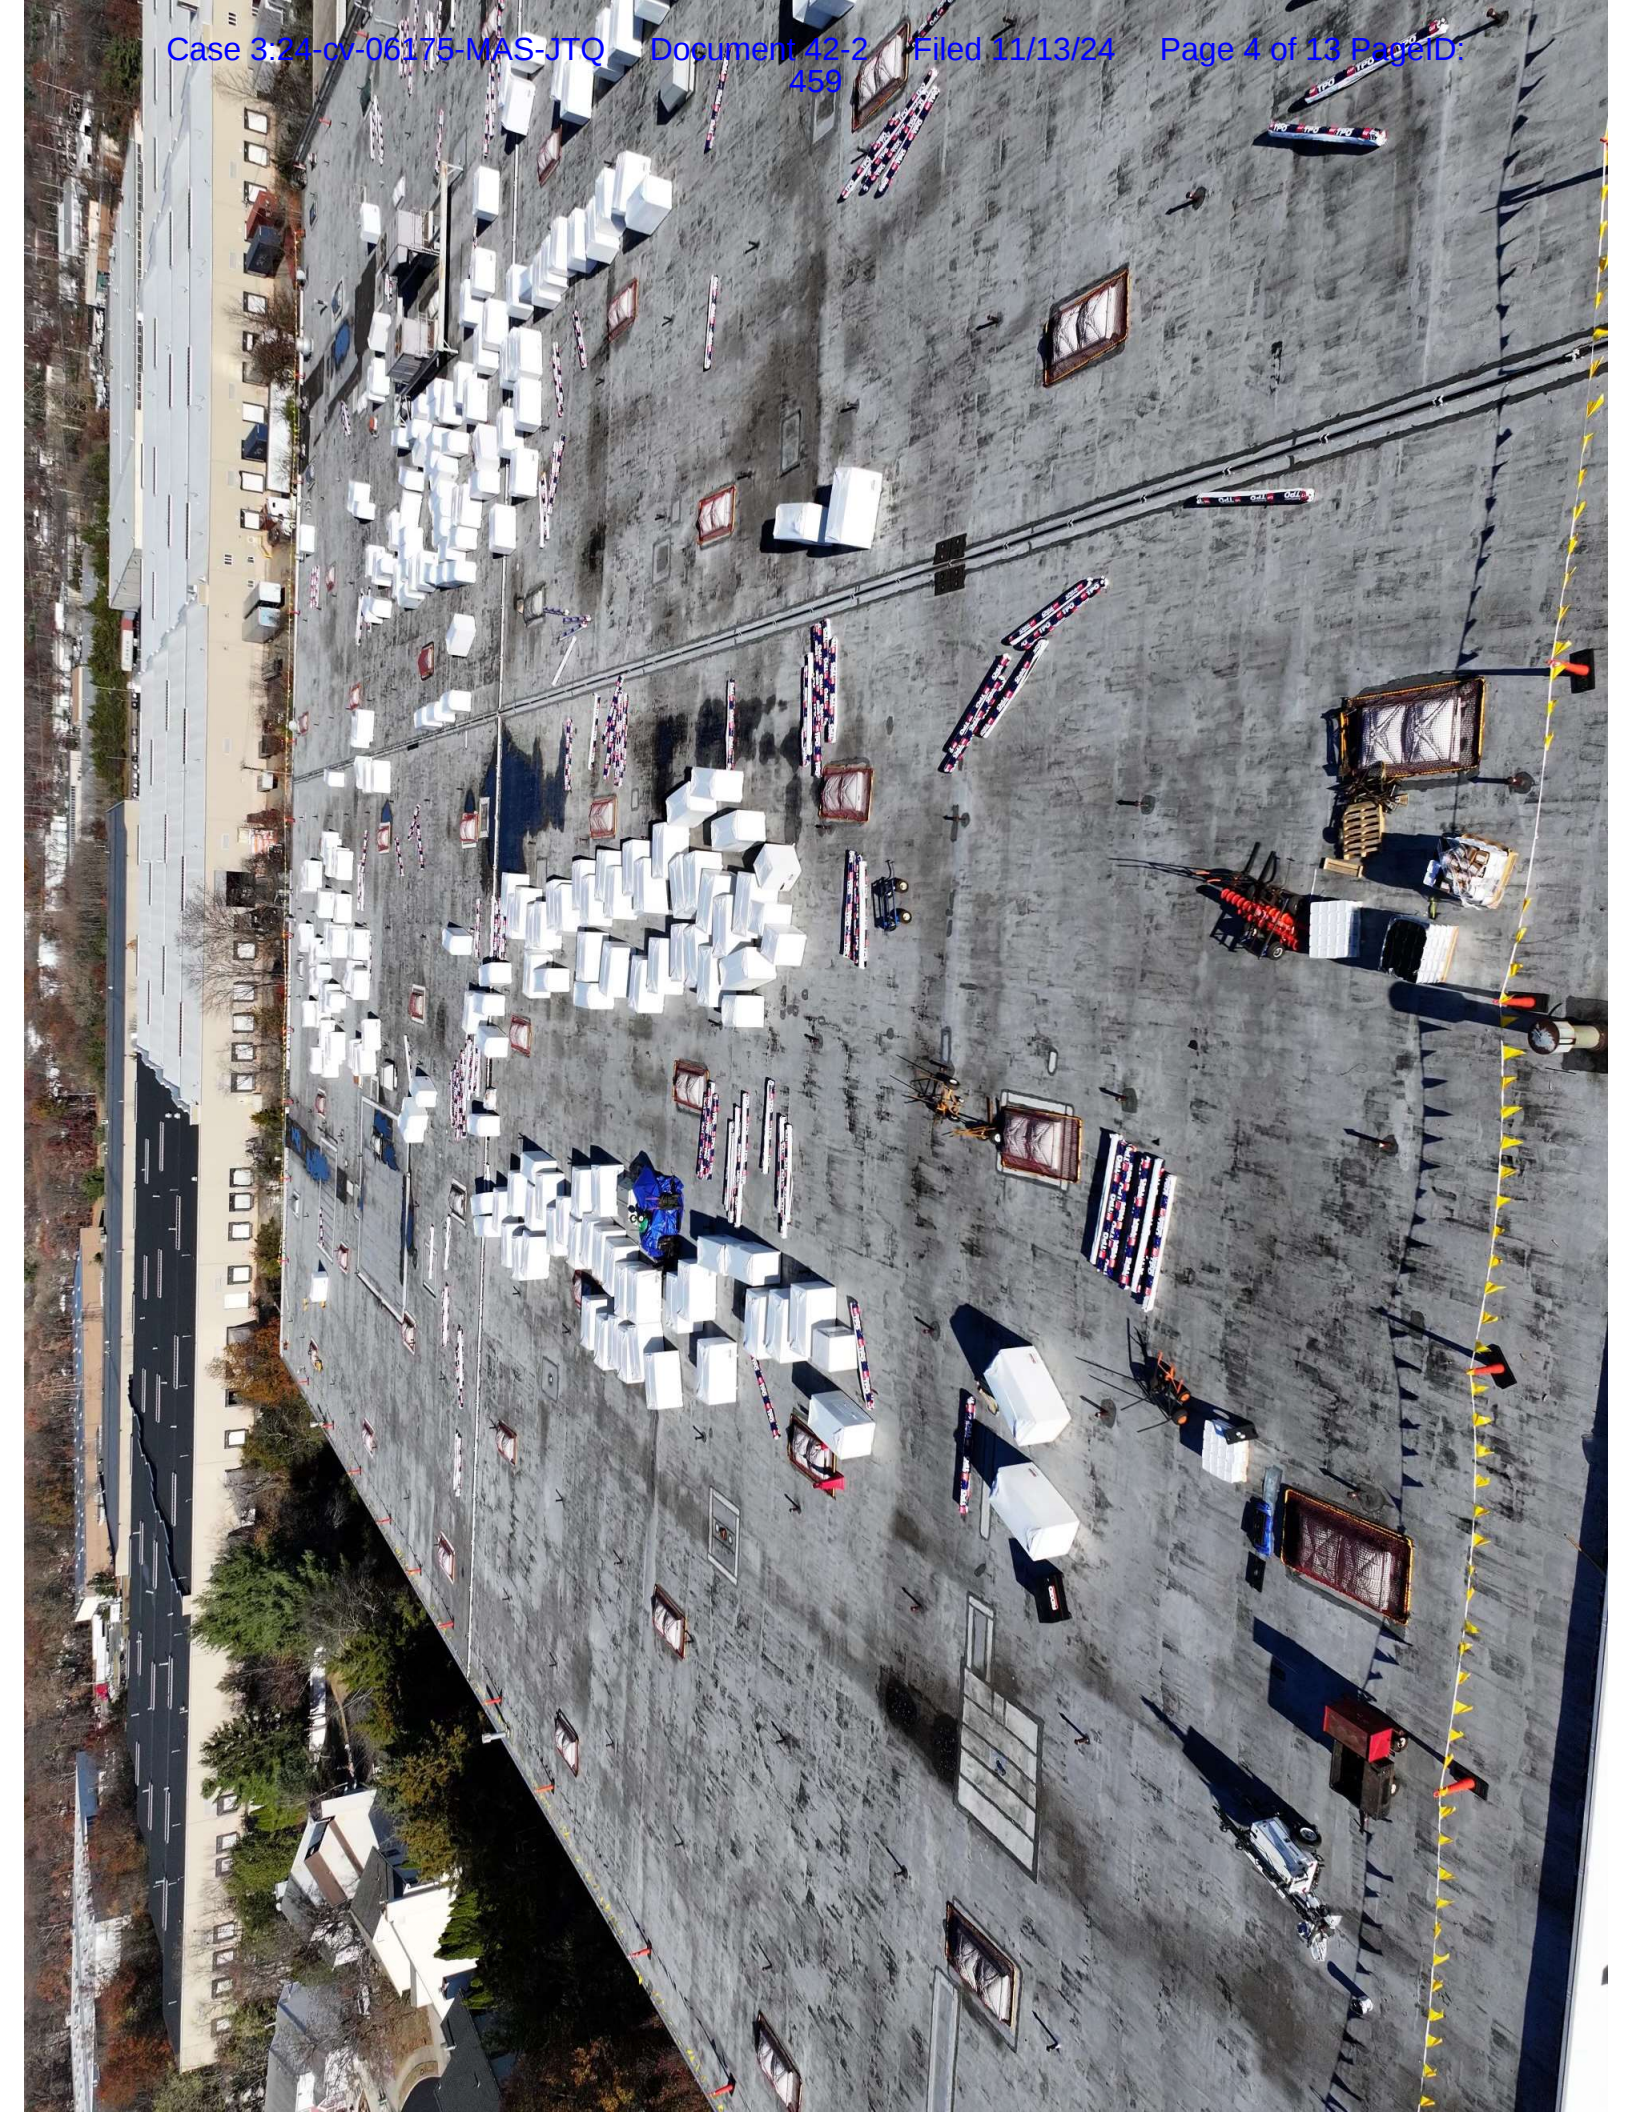









4720NC

2.00"

24 PIECES LTTR 11.4 20 PSI
1536 BD FT 768 SQ FT
EnergyGuard Iso 2.0"x4'x8'



NC 11/05/24 07:35:05

NC100199660

GAF**EnergyGuard™**
Polyiso Insulation

Flat Polyiso with GRF Facers
ASTM C1289 Type II Class 1 Grade 2 (20 psi) or Grade 3 (25 psi).

WARNING: DO NOT LEAVE EXPOSED. THIS PRODUCT WILL BURN IF EXPOSED TO AN IGNITION SOURCE OF SUFFICIENT HEAT AND INTENSITY. THIS PRODUCT, LIKE OTHER ORGANIC MATERIALS, CAN RELEASE TOXIC SMOKE IF BURNED. THIS PRODUCT SHOULD ONLY BE USED IN STRICT ACCORDANCE WITH GAF RECOMMENDED USES AND APPLICATION INSTRUCTIONS.

For specific safety and hazard information, see SDS data on gaf.com.

LIMITED WARRANTY INFORMATION: See Limited Warranty on EnergyGuard™ Polyiso Materials at gaf.com for complete coverage and restrictions.

CAUTION! MATERIAL STORAGE AND PROTECTION: GAF materials leave the factory dry and must be stored to prevent the materials from getting wet. Store in a well-ventilated, ambient temperature environment out of the weather. At the job site, all materials must be raised above ground or stored on pallets at not less than 4" from the ground. Do not use for compressed materials. Reference PIMA Technical Bulletin #108. Insulation as can be covered the same way for compressed materials. See www.gaf.com for Storage and Handling Recommendations for Polyiso roof insulation.

Where sold, compliant with State HFC regulations. More information available at www.polyiso.org.

Code Approvals

UL US
Listed for use in the United States as to material properties, and as to the use of the material in the United States.

Code Approvals

UL US
Listed for use in the United States as to material properties, and as to the use of the material in the United States.

FM

APPROVED

UL

EH1306-03

Certifications

PIMA
QualityMark
Insulation Certified (1778)



We protect what matters most.




© 2023 GAF • 1 Campus Drive, Parsippany, NJ 07054 • 1-877-GAF-ROOF • gaf.com

DRILL-TEC

FOR ROOFING SYSTEMS

TYPE
DRILL-TEC™ RHINO BOND® TPO
XHD PLATE

PART NO. SIZE (P)
4574 3" 

BARCODE



608309374176

SKU

RBP80A-TPO-DT

QTY:



500



© 2020 GAF, INC.
All rights reserved. GAF, DRILL-TEC, and RHINO BOND are trademarks of GAF, Inc.



4574200-00000000

L53508
FMM
09/10/24

DTPF GAF-04/20 Rev.
4/2020



STORAGE:
Store indoors protected from moisture
and extreme temperatures.
IMPORTANT:
Repair leaks promptly to avoid adverse
effects, including mold growth.

QUANTITY: 20 Per Box

8A010920GA

FLUTED CORNER

EVERGUARD[®] TPO



©2019 GAF 5/19 • 1 Campus Drive, Parsippany, NJ 07054 • 1-800-766-3411 • gaf.com 8A010920GAL

**EVERGUARD®****TPO****T-JOINT COVER PATCH****QUANTITY:** 100 Per Box**STORAGE:**

Store indoors protected from moisture and extreme temperatures.

IMPORTANT:

Repair leaks promptly to avoid adverse effects, including mold growth.

7714920GA

©2019 GAF 5/19 • 1 Campus Drive, Parsippany, NJ 07054 • 1-800-766-3411 • gaf.com 7714920GAL

**EVERGUARD®****TPO**



DETAILING MEMBRANE

7631920GA

NOMINAL DIMENSIONS:

Roll Size: 24" x 50' (100 sq. ft.)
610 mm x 15.24 m (9.3 m²)

STORAGE:

Store rolls on their sides on pallets or shelving in a dry area.

IMPORTANT:

Repair leaks promptly to avoid adverse effects, including mold growth.

©2019 GAF 5/19 • 1 Campus Drive, Parsippany, NJ 07054 • 1-800-766-3411 • gaf.com

7631L